



Radio Cable Guide

Rev 2.1 · 2026-10-24

498
radios

16
brands

12
cables

FIND YOUR CABLE

1. Find your radio brand and model in the index at the back (page 14). It gives the cable and its page.
2. Turn to that page. Compare the plug drawing and the checks with the plug on your radio's current speaker mic.
3. No match? The open-end cable on page 13 wires to any radio.
4. For custom installs, the pin map and wiring show exactly which Hirose pin reaches which plug contact.

HEADSET END, EVERY CABLE




PIN	SIGNAL	OPEN-END WIRE
1	Speaker +	Green
2	Mic +	Red
3	Reserved	.
4	PTT	Gold
5	Speaker -	Blue
6	Ground	Black

CABLE INDEX

SKU	CABLE	RADIOS	PAGE
PS-0110	Kenwood K1 Cable	182	2
PS-0111	Motorola M1 / Yaesu SSM-17B Cable	38	3
PS-0112	Motorola 2.5mm Cable	162	4
PS-0115	Midland S2 Cable	29	5
PS-0118	Yaesu SCU-42 Cable	6	6
PS-0119	ICOM HM-240 Cable	4	7
PS-0120	Yaesu SSM-17H Cable	9	8
PS-0121	Yaesu SSM-17A Cable	21	9
PS-0122	ICOM HM-158LA Cable	36	10
PS-0123	General Aviation Cable	1	11
PS-0124	Motorola Multi-Pin Cable	10	12
PS-0116	Custom Cable, Open End	Any	13

Kenwood K1 Cable

PS-0110 · V1.0 · SC-A0110 · 182 radios

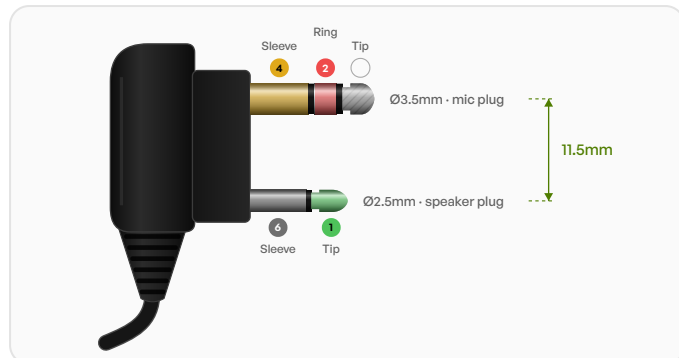


PIN MAP

PIN	SIGNAL	RADIO END
1	Speaker +	Speaker plug tip
2	Mic +	Mic plug ring
3	Reserved	Not connected
4	PTT	Mic plug sleeve
5	Speaker -	Not connected
6	Ground	Speaker plug sleeve

CHECK YOUR PLUG

- Two plugs side by side
- 11.5mm between plug centers
- Mic plug: three contacts
- Speaker plug: two contacts

WIRING

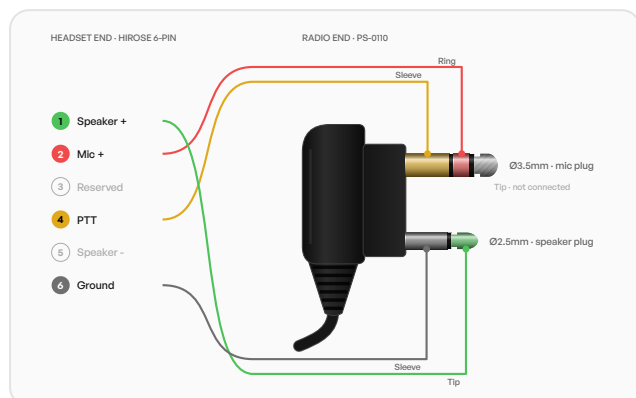

FITS THESE RADIOS

Baofeng 18

UV-5R, UV-5RA, UV-5RA Plus, UV-5RE, UV-5RE Plus, UV3R Plus, UV-5RB, UV-5RC, UV-82, UV-8D, UV-B5, UV-B6, GT-3, BF-A52, UV-6R, UV-5X, DM-5R Plus, UV-5RTP

Hytera 12

TC-268, TC-368, TC-268S, TC-368S, TC-368G, TC-265, TC-265S, TC-365S, TC-270, TC-370, TC-380, TC-380M

Kenwood 56

TK-208, TK-220, TK-240, TK-240D, TK-248, TK-250, TK-260, TK-260G, TK-270G, TK-272G, TK-272, TK-278G, TK-308, TK-320, TK-340, TK-340D, TK-350, TK-353, TK-370, TK-430, TK-431, TK-2100, TK-2102L, TK-2107, TK-2118, TK-2160, TK-2170, TK-2170K, TK-2200, TK-2200L, TK-2200LP, TK-2202, TK-2202K, TK-2212, TK-2212K, TK-3100, TK-303, TH-D7, TH-D7A, TH-D7AG, TH-D7E, TH-F6A, TH-F7, TH-F7E, TH-G71, TH-G71E, TH-K2, TH-K2A, TH-K2AT, TH-K2E, TH-21, TH-21T, TH-21BT, TH-225, TH-42, TH-15

Puxing 10

PX-777, PX-777 Plus, PX-666, PX-3288, PX-888, PX-888K, PX-328, PX-333, PX-999, PX-555

Quansheng 7

TG-UV2, TG-K4AT, TG-2AT, TG-45AT, TG-42AT, TG-22AT, TG-25AT

Retevis 50

RT22, RT21, RT19, H-777, H-777S, RT15, RT22S, RT68, RB18, RT27, RB35, RT21V, RB26, RT18, RT1, RT28, RT5, RT-5R, RT-5RV, RT85, RT76, RT76P, RT7, RT27V, RB38V, RB17V, RB17A, RT67, RT17, RB17, RT69, RB27, RT80, RT81, RT84, RT53, RT10, RT43, RT72, RT26, RT86, RB25, RA16, RB37, RT3S, RA85, RB87, RB29, RB39, RB85

TYT 16


300, 500, 600, 800, 900, 990, TH-F2, TH-F3, TH-F5, TH-F6, TH-F7, TH-UVF1, TH-F8, TH-UVF8D, TH-UVF9, TH-UVF9D

Wouxun 13

KG-UVD1P, KG-UV6D, KG-UV8D, KG-UVA1, KG-699, KG-689, KG-669, KG-659, KG-679, KG-889, KG-869, KG-819, KG-816

Motorola M1 / Yaesu SSM-17B Cable


PS-0111 · V1.1 · SC-A0111 · 38 radios

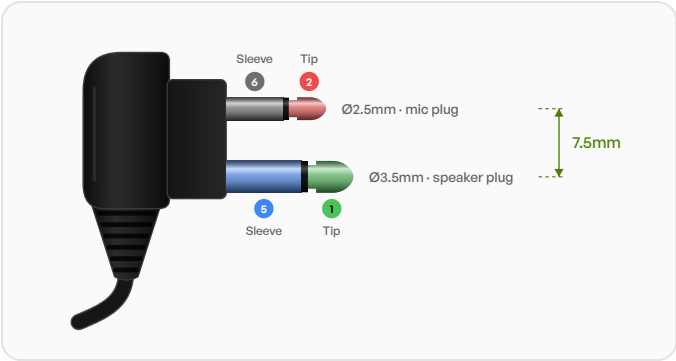

CHECK YOUR PLUG

- Two plugs side by side
- 7.5mm between plug centers
- Each plug has two contacts

WIRING

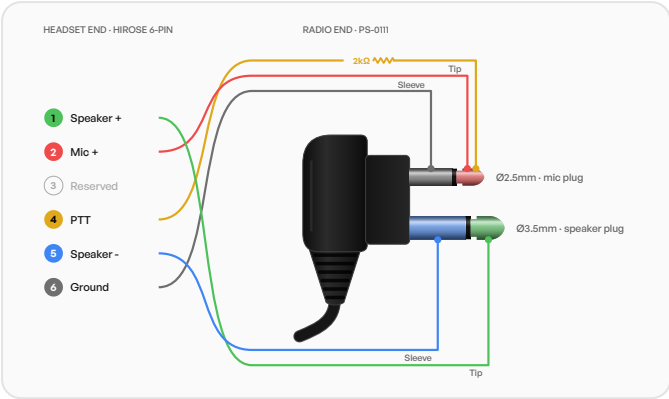

FITS THESE RADIOS

Motorola 35

CP040, CP88, CP100, CP150, CP200, CT150, CT250, CT450, CT450LS, GP68, GP88, GP88S, GP300, GP308, GP350, GP2000, GTI, GTX, P10, P040, P080, P110, P1225, P200, SP10, SP21, SP50, LTS2000, XTN446, XTN500, XTN600, CIS446, HANDIECOM, HANDIEPRO, DTR2400.

Yaesu 3


FT-25, FT-65, FT-4X

PIN MAP

PIN	SIGNAL	RADIO END
1	Speaker +	Speaker plug tip
2	Mic +	Mic plug tip
3	Reserved	Not connected
4	PTT	Mic plug tip via 2kΩ
5	Speaker -	Speaker plug sleeve
6	Ground	Mic plug sleeve

Motorola 2.5mm Cable


PS-0112 · V1.1 · SC-A0112 · 162 radios

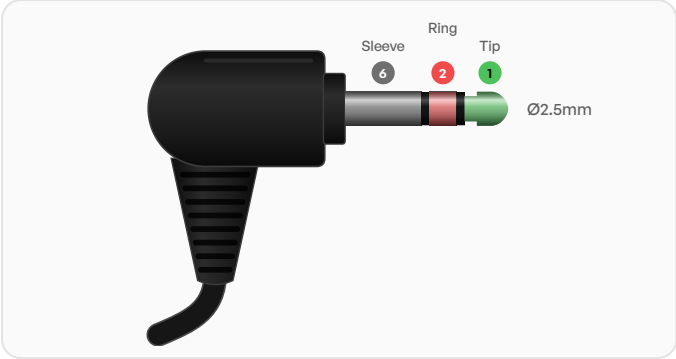

CHECK YOUR PLUG

- One right-angle plug
- 2.5mm diameter
- Three contacts: tip, ring, sleeve

WIRING

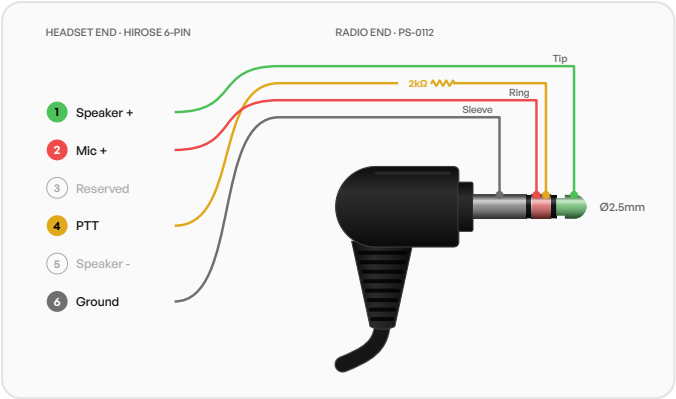

PIN MAP

PIN	SIGNAL	RADIO END
1	Speaker +	Tip
2	Mic +	Ring
3	Reserved	Not connected
4	PTT	Ring via 2kΩ
5	Speaker -	Not connected
6	Ground	Sleeve

FITS THESE RADIOS

Cobra 19

CXT85, PR245, PR560, PR240, PR3100, PR3175, PR350, PR3000, PR4000, PR4250, PR4750, MRHH100, MRHH200, T5620, T5710, T5720, T5920, T5950, T6320

Garmin 3


650, 700, 755

Motorola 140

EM1000, EM1000R, EM1010TPR, EM1020R, F60, FR50, FR60, FV200, FV200AA, FV200R, FV300, FV500, FV500AA, FV500R, FV600, FV700, FV750, FV800, MB140R, MC220R, MC225R, MD200TPR, MH230R, MH230TPR, MHP61, MHP71, MHP81, MJ270R, MR350R, MR355R, MR356R, MS350R, MT350R, MT352TPR, MU350R, SX500, SX620R, SX700, SX709R, SX750, SX800, SX900, SX920R, T100, T200, T200TP, T260, T260TP, T265, T270, T280, T289, T400, T4000, T402, T460, T465, T480, T4800, T4800AA, T4900, T4900AA, T5000, T5000AA, T5100, T5146, T5200, T5300, T5320, T5400, T5410, T5412, T5420, T5422, T5500, T5500AA, T5512, T5522, T5532, T5550, T5600, T5620, T5700, T5710, T5720, T5725, T5800, T5820, T5822, T5900, T5920, T5950, T5950AA, T600, T6000, T6200, T6210, T6212, T6220, T6222, T6250, T6300, T6300AA, T6310, T6312, T6320, T6322, T6400, T6412, T6500, T6500AA, T6510, T6512, T6550, T6552R, T7000, T7100, T7100R, T7150, T7150R, T7200, T7200AA, T7400, T7400AA, T7400R, T7450, T7450R, T800, T8000, T8500, T8550, T9000, T9500, T9500R, T9500XLR, T9550, T9550XLR, T9580XLR, T9650, T9680

Midland S2 Cable


PS-0115 · V1.0 · SC-A0115 · 29 radios

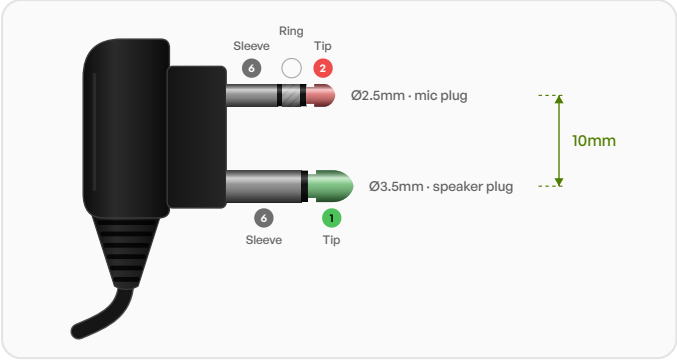

CHECK YOUR PLUG

- Two plugs side by side
- 10mm between plug centers
- Mic plug: 2.5mm, the thinner plug
- Speaker plug: 3.5mm

WIRING

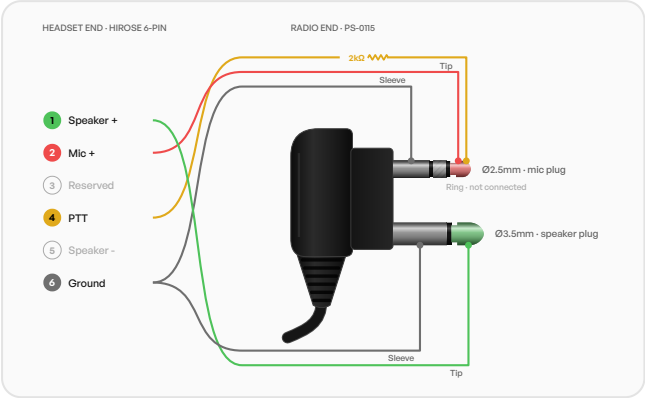

FITS THESE RADIOS

Maxon 17

SP14, SP130, SP120, SP140, 75-785, 75440, GTX-200, GTX-250, GTX-300, GTX-325, GTX-400, GTX-444, GTX-450, G-225, G-227, G-300, GXT500VP

Midland 12


GXT1000, GXT1030, GXT1050, GXT3000, GXT67, LXT500, LXT500, LXT535, LXT600, LXT600, LXT630, LXT633

PIN MAP

PIN	SIGNAL	RADIO END
1	Speaker +	Speaker plug tip
2	Mic +	Mic plug tip
3	Reserved	Not connected
4	PTT	Mic plug tip via 2kΩ
5	Speaker -	Not connected
6	Ground	Mic plug sleeve, Speaker plug sleeve

Yaesu SCU-42 Cable


PS-0118 · V1.0 · 6 radios

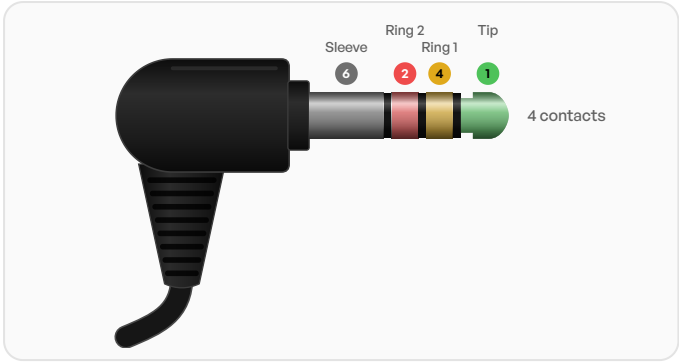

CHECK YOUR PLUG

- One right-angle plug
- Four contacts: tip, two rings, sleeve
- Yaesu aviation handhelds

WIRING

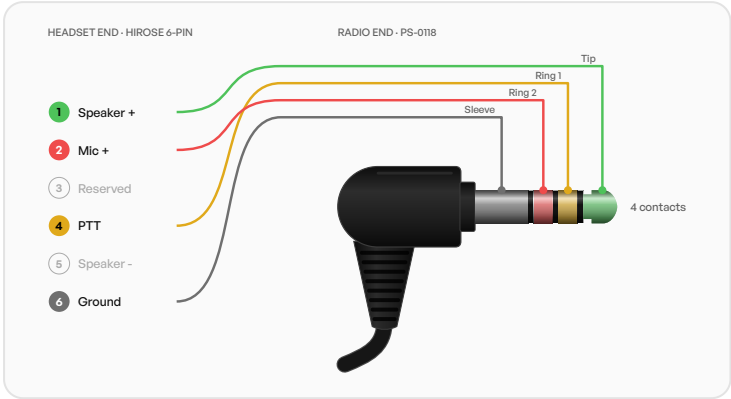

FITS THESE RADIOS


Yaesu 6
FTA450, FTA250L, FTA450L, FTA550, FTA550L,
FTA750L

PIN MAP

PIN	SIGNAL	RADIO END
1	Speaker +	Tip
2	Mic +	Ring 2
3	Reserved	Not connected
4	PTT	Ring 1
5	Speaker -	Not connected
6	Ground	Sleeve

ICOM HM-240 Cable


PS-0119 · V1.0 · 4 radios

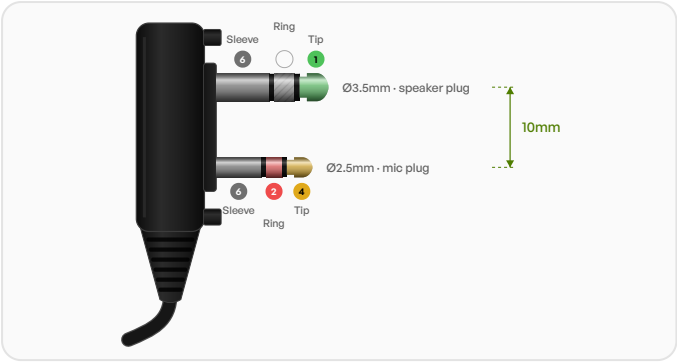

CHECK YOUR PLUG

- Two plugs side by side on a flat housing
- 10mm between plug centers
- ICOM aviation handhelds

WIRING

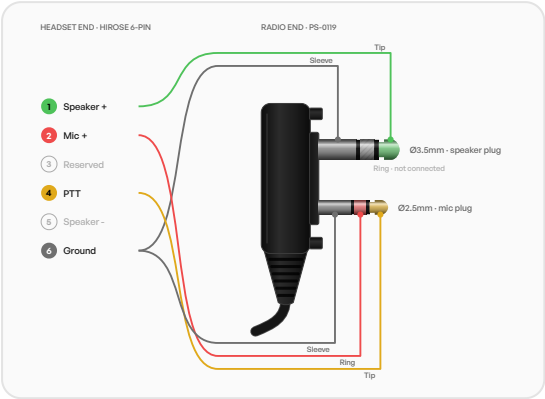

FITS THESE RADIOS


ICOM 4
IC-A25N Aviation, IC-A25C Aviation, IC-A16B Aviation, IC-A16 Aviation

PIN MAP

PIN	SIGNAL	RADIO END
1	Speaker +	Speaker plug tip
2	Mic +	Mic plug ring
3	Reserved	Not connected
4	PTT	Mic plug tip
5	Speaker -	Not connected
6	Ground	Speaker plug sleeve, Mic plug sleeve

Yaesu SSM-17H Cable


PS-0120 · V1.0 · 9 radios

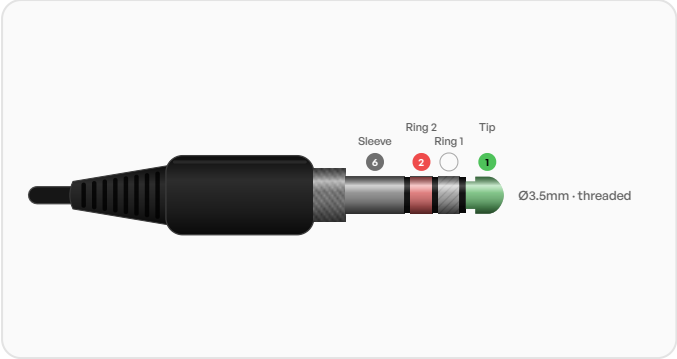

CHECK YOUR PLUG

- One straight plug with a threaded collar
- 3.5mm diameter
- Four contacts: tip, two rings, sleeve

WIRING

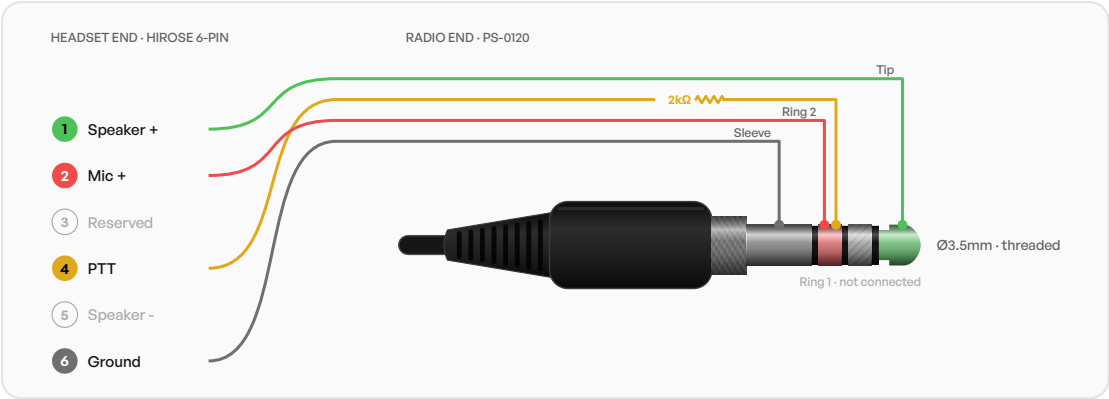

FITS THESE RADIOS


Yaesu 9
FT-270, FT-270E, FT-270R, VX-6, VX-6E, VX-6R, VX-7, VX-7E, VX-7R

PIN MAP

PIN	SIGNAL	RADIO END
1	Speaker +	Tip
2	Mic +	Ring 2
3	Reserved	Not connected
4	PTT	Ring 2 via 2kΩ
5	Speaker -	Not connected
6	Ground	Sleeve

Yaesu SSM-17A Cable


PS-0121 · V1.0 · 21 radios

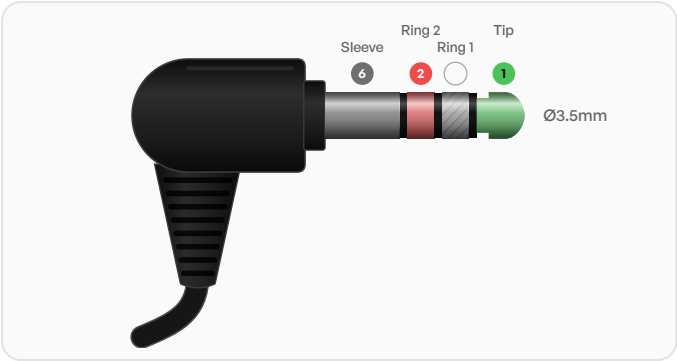

CHECK YOUR PLUG

- One right-angle plug
- 3.5mm diameter, no thread
- Four contacts: tip, two rings, sleeve

WIRING

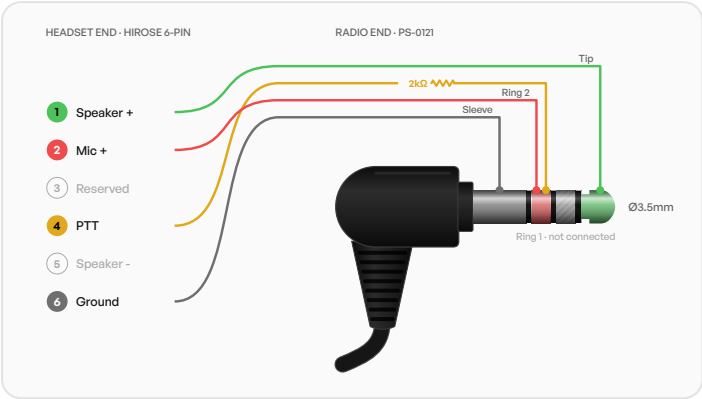

FITS THESE RADIOS


Yaesu 21
FT-10R, FT-1D, FT-1DE, FT-1DR, FT-2D, FT-2DE, FT-2DR, FT-3D, FT-3DR, FT-50, FT-60, FT-60E, FT-60R, FT-70D, VX-3, VX-3E, VX-3R, VX-5R, VX-8, VX-8D, VX-8R

PIN MAP

PIN	SIGNAL	RADIO END
1	Speaker +	Tip
2	Mic +	Ring 2
3	Reserved	Not connected
4	PTT	Ring 2 via 2kΩ
5	Speaker -	Not connected
6	Ground	Sleeve

ICOM HM-158LA Cable


PS-0122 · V1.0 · 36 radios

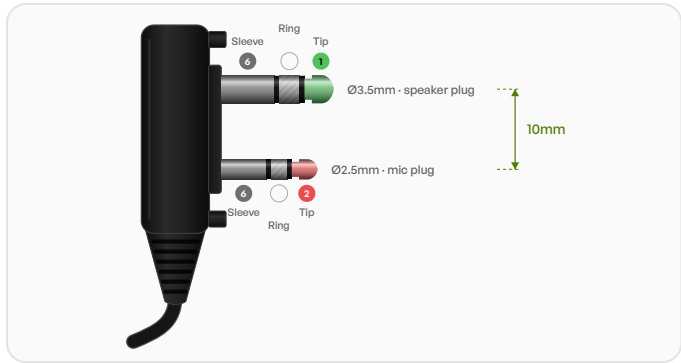

CHECK YOUR PLUG

- Two plugs side by side with locating tabs
- 10mm between plug centers
- ICOM land mobile radios

WIRING

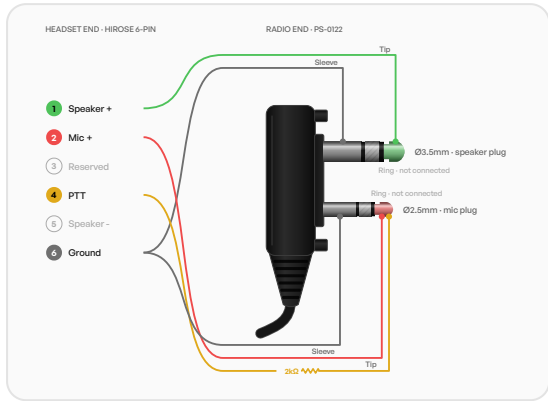

FITS THESE RADIOS

ICOM 36


IC-V86/IC-U86 Amateur Handheld, IC-V86 Amateur Handheld, IC-U86 Amateur Handheld, IC-T10 Amateur Handheld, IC-F3400D/IC-F4400D Land Portable, IC-F3400DT/DS Land Portable, IC-F3400DPT/DPS Land Portable, IC-F4400DT/DS Land Portable, IC-F4400DPT/DPS Land Portable, IC-F52D/IC-F62D Land Portable, IC-F52D UL/IC-F62D UL Land Portable, IC-F3230D/IC-F4230D Land Portable, IC-F3230DT Land Portable, IC-F3230DS Land Portable, IC-F4230DT Land Portable, IC-F4230DS Land Portable, IC-F1100D/IC-F2100D Land Portable, IC-F1100DT Land Portable, IC-F1100DS Land Portable, IC-F1100D Land Portable, IC-F2100DT Land Portable, IC-F2100DS Land Portable, IC-F2100D Land Portable, IC-F1000/IC-F2000 Land Portable, IC-F1000T Land Portable, IC-F1000S Land Portable, IC-F1000 Land Portable, IC-F2000T Land Portable, IC-F2000S Land Portable, IC-F2000 Land Portable, IC-F3001/IC-F4001 Land Portable, IC-F3001 Land Portable, IC-F4001 Land Portable, IC-V10MR Land Portable, IC-V3MR Land Portable, IC-F200 Land Portable

PIN MAP

PIN	SIGNAL	RADIO END
1	Speaker +	Speaker plug tip
2	Mic +	Mic plug tip
3	Reserved	Not connected
4	PTT	Mic plug tip via 2kΩ
5	Speaker -	Not connected
6	Ground	Speaker plug sleeve, Mic plug sleeve

General Aviation Cable

PS-0123 · V0.1 · 1 radios

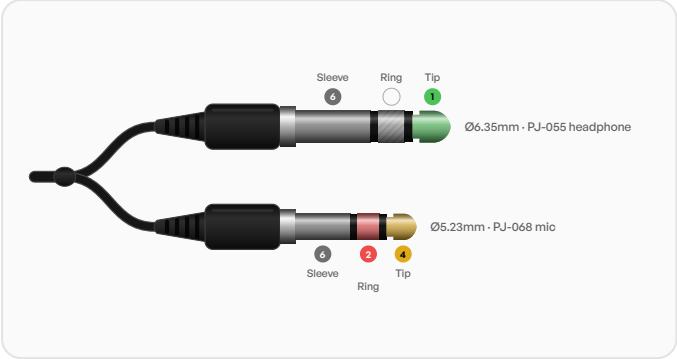


PIN MAP

PIN	SIGNAL	RADIO END
1	Speaker +	PJ-055 headphone tip
2	Mic +	PJ-068 mic ring
3	Reserved	Not connected
4	PTT	PJ-068 mic tip
5	Speaker -	Not connected
6	Ground	PJ-055 headphone sleeve, PJ-068 mic sleeve

CHECK YOUR PLUG

- Two separate plugs on a Y split
- PJ-055 headphone plug, 6.35mm
- PJ-068 mic plug, 5.23mm
- Split 250mm from the plugs

WIRING

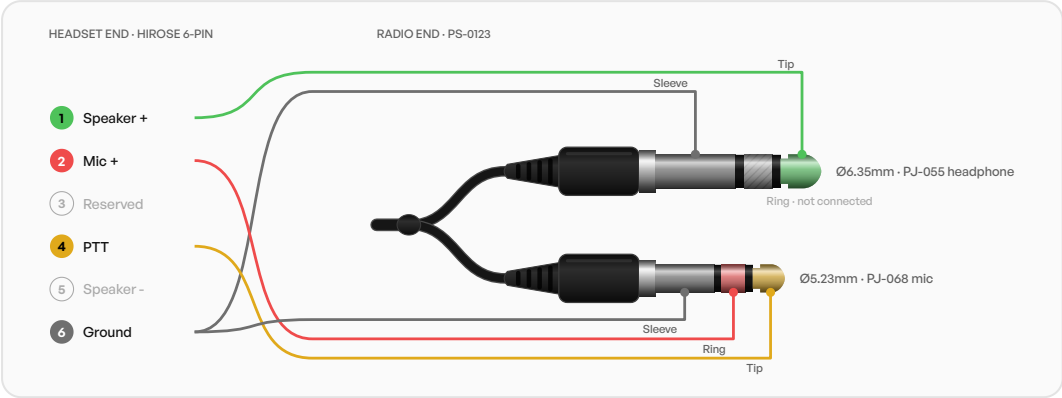


FITS THESE RADIOS

Dual GA 1
General Aviation

Motorola Multi-Pin Cable


PS-0124 · V1.0 · 10 radios

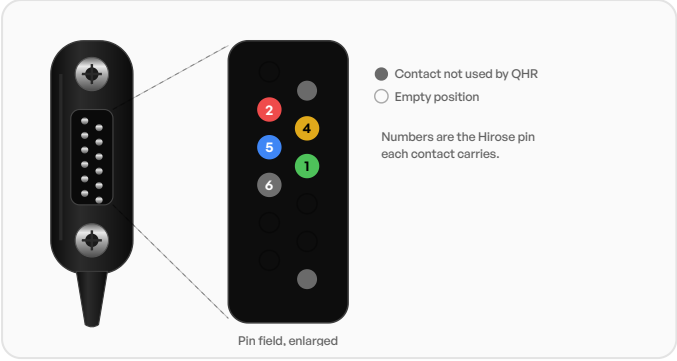

CHECK YOUR PLUG

- Flat side connector with two thumb screws
- Pin field between the screws
- For Motorola APX and XPR radios

WIRING

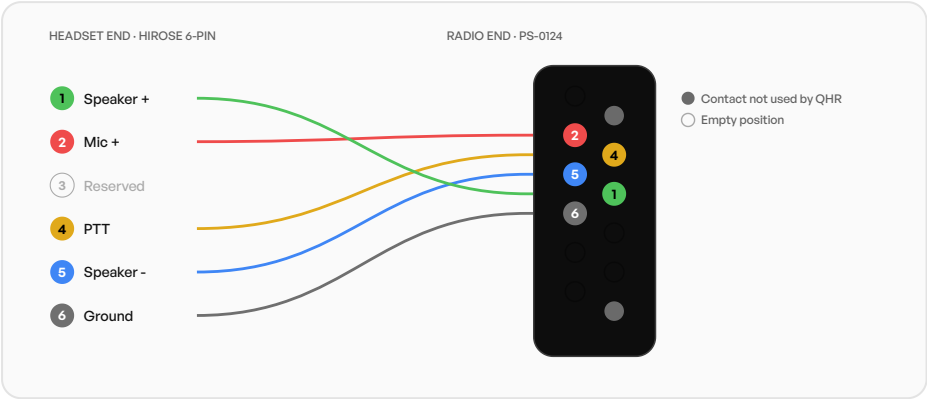

FITS THESE RADIOS


Motorola 10
APX-4000, APX-6000, APX-7000, APX-8000, XPR-7350, XPR-7350e, XPR-7380e, XPR-7550, XPR-7550e, XPR-7580e

PIN MAP

PIN	SIGNAL	RADIO END
1	Speaker +	Contact 1
2	Mic +	Contact 2
3	Reserved	Not connected
4	PTT	Contact 4
5	Speaker -	Contact 5
6	Ground	Contact 6

Custom Cable, Open End


PS-0116 · V1.0 · Open end

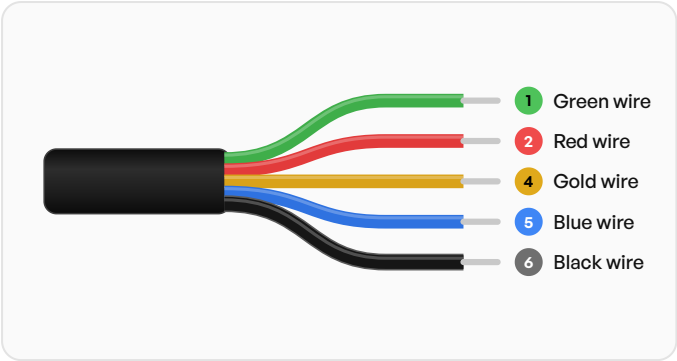

CHECK YOUR PLUG

- Five bare wires, colour coded
- Wire to your radio's own connector
- Pin 3 is not wired

WIRING

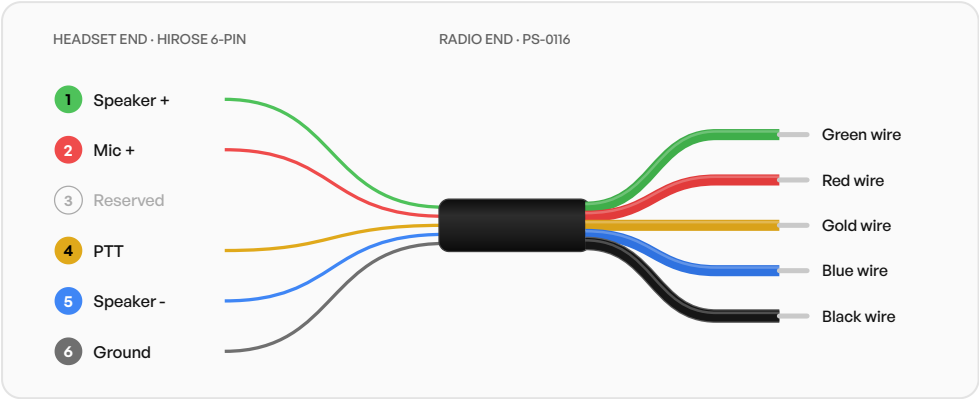

USE IT FOR

For radios not on this list, or your own wiring. Match each coloured wire to your

radio's connector using its manual. Pin 3 is not wired. If you are not sure, have a radio technician wire it.

PIN MAP

PIN	SIGNAL	WIRE
1	Speaker +	Green wire
2	Mic +	Red wire
3	Reserved	Not wired
4	PTT	Gold wire
5	Speaker -	Blue wire
6	Ground	Black wire

Find your radio

Each model shows its cable and the page to turn to. Not listed? Use the open-end cable on page 13.

Baofeng 18

UV-5R	PS-0110	2
UV-5RA	PS-0110	2
UV-5RA Plus	PS-0110	2
UV-5RE	PS-0110	2
UV-5RE Plus	PS-0110	2
UV3R Plus	PS-0110	2
UV-5RB	PS-0110	2
UV-5RC	PS-0110	2
UV-82	PS-0110	2
UV-8D	PS-0110	2
UV-B5	PS-0110	2
UV-B6	PS-0110	2
GT-3	PS-0110	2
BF-A52	PS-0110	2
UV-6R	PS-0110	2
UV-5X	PS-0110	2
DM-5R Plus	PS-0110	2
UV-5RTP	PS-0110	2

Cobra 19

CXT85	PS-0112	4
PR245	PS-0112	4
PR560	PS-0112	4
PR240	PS-0112	4
PR3100	PS-0112	4
PR3175	PS-0112	4
PR350	PS-0112	4
PR3000	PS-0112	4
PR4000	PS-0112	4
PR4250	PS-0112	4
PR4750	PS-0112	4
MRHH100	PS-0112	4
MRHH200	PS-0112	4
T5620	PS-0112	4
T5710	PS-0112	4
T5720	PS-0112	4
T5920	PS-0112	4
T5950	PS-0112	4
T6320	PS-0112	4

Dual GA 1

General Aviation	PS-0123	11
------------------	---------	----

Garmin 3

650	PS-0112	4
700	PS-0112	4
755	PS-0112	4

Hytera 12

TC-268	PS-0110	2
TC-368	PS-0110	2
TC-268S	PS-0110	2
TC-368S	PS-0110	2
TC-368G	PS-0110	2
TC-265	PS-0110	2
TC-265S	PS-0110	2

TC-365S	PS-0110	2
TC-270	PS-0110	2
TC-370	PS-0110	2
TC-380	PS-0110	2
TC-380M	PS-0110	2

ICOM 40

IC-V86/IC-U86	PS-0122	10
Amateur Handheld		
IC-V86 Amateur	PS-0122	10
Handheld		
IC-U86 Amateur	PS-0122	10
Handheld		
IC-T10 Amateur	PS-0122	10
Handheld		
IC-A25N Aviation	PS-0119	7
IC-A25C Aviation	PS-0119	7
IC-A16B Aviation	PS-0119	7
IC-A16 Aviation	PS-0119	7
IC-F3400D/IC-F4400D Land	PS-0122	10
Portable		

IC-F3400DT/DS Land	PS-0122	10
Portable		
IC-F3400DPT/DPS	PS-0122	10
Land Portable		
IC-F4400DT/DS Land	PS-0122	10
Portable		
IC-F4400DPT/DPS	PS-0122	10
Land Portable		
IC-F52D/IC-F62D Land	PS-0122	10
Portable		
IC-F52D UL/IC-F62D	PS-0122	10
UL Land Portable		
IC-F3230D/IC-F4230D	PS-0122	10
Land Portable		
IC-F3230DT Land	PS-0122	10
Portable		
IC-F3230DS Land	PS-0122	10
Portable		
IC-F4230DT Land	PS-0122	10
Portable		
IC-F4230DS Land	PS-0122	10
Portable		
IC-F1100D/IC-F2100D	PS-0122	10
Land Portable		
IC-F1100DT Land	PS-0122	10
Portable		
IC-F1100DS Land	PS-0122	10
Portable		
IC-F1100D Land	PS-0122	10
Portable		
IC-F2100DT Land	PS-0122	10
Portable		
IC-F2100DS Land	PS-0122	10
Portable		
IC-F2100D Land	PS-0122	10
Portable		
IC-F1000/IC-F2000	PS-0122	10
Land Portable		
IC-F1000T Land	PS-0122	10
Portable		

IC-F1000S Land	PS-0122	10
Portable		
IC-F1000 Land	PS-0122	10
Portable		
IC-F2000T Land	PS-0122	10
Portable		
IC-F2000S Land	PS-0122	10
Portable		
IC-F2000 Land	PS-0122	10
Portable		
IC-F3001/IC-F4001	PS-0122	10
Land Portable		
IC-F3001 Land	PS-0122	10
Portable		
IC-F4001 Land	PS-0122	10
Portable		
IC-V10MR Land	PS-0122	10
Portable		
IC-V3MR Land	PS-0122	10
Portable		
IC-F200 Land	PS-0122	10
Portable		

Kenwood 56

TK-208	PS-0110	2
TK-220	PS-0110	2
TK-240	PS-0110	2
TK-240D	PS-0110	2
TK-248	PS-0110	2
TK-250	PS-0110	2
TK-260	PS-0110	2
TK-260G	PS-0110	2
TK-270G	PS-0110	2
TK-272G	PS-0110	2
TK-272	PS-0110	2
TK-278G	PS-0110	2
TK-308	PS-0110	2
TK-320	PS-0110	2
TK-340	PS-0110	2
TK-340D	PS-0110	2
TK-350	PS-0110	2
TK-353	PS-0110	2
TK-370	PS-0110	2
TK-430	PS-0110	2
TK-431	PS-0110	2
TK-2100	PS-0110	2
TK-2102L	PS-0110	2
TK-2107	PS-0110	2
TK-2118	PS-0110	2
TK-2160	PS-0110	2
TK-2170	PS-0110	2
TK-2170K	PS-0110	2
TK-2200	PS-0110	2
TK-2200L	PS-0110	2
TK-2200LP	PS-0110	2
TK-2202	PS-0110	2
TK-2202K	PS-0110	2
TK2212	PS-0110	2
TK-2212K	PS-0110	2
TK3100	PS-0110	2

TK-303	PS-0110	2
TH-D7	PS-0110	2
TH-D7A	PS-0110	2
TH-D7AG	PS-0110	2
TH-D7E	PS-0110	2
TH-F6A	PS-0110	2
TH-F7	PS-0110	2
TH-F7E	PS-0110	2
TH-G71	PS-0110	2
TH-G71E	PS-0110	2
TH-K2	PS-0110	2
TH-K2A	PS-0110	2
TH-K2AT	PS-0110	2
TH-K2E	PS-0110	2
TH-21	PS-0110	2
TH-21T	PS-0110	2
TH-21BT	PS-0110	2
TH-225	PS-0110	2
TH-42	PS-0110	2
TH-15	PS-0110	2

Maxon 17

SP14	PS-0115	5
SP130	PS-0115	5
SP120	PS-0115	5
SP140	PS-0115	5
75-785	PS-0115	5
75440	PS-0115	5
GTX-200	PS-0115	5
GTX-250	PS-0115	5
GTX-300	PS-0115	5
GTX-325	PS-0115	5
GTX-400	PS-0115	5
GTX-444	PS-0115	5
GTX-450	PS-0115	5
G-225	PS-0115	5
G-227	PS-0115	5
G-300	PS-0115	5
GXT500VP	PS-0115	5

Midland 12

GXT1000	PS-0115	5
GXT1030	PS-0115	5
GXT1050	PS-0115	5
GXT3000	PS-0115	5
GXT67	PS-0115	5
LXT500	PS-0115	5
LXT500	PS-0115	5
LXT535	PS-0115	5
LXT600	PS-0115	5
LXT600	PS-0115	5
LXT630	PS-0115	5
LXT633	PS-0115	5

Motorola 185

CP040	PS-0111	3
CP88	PS-0111	3

CP100	PS-0111	3	MR356R	PS-0112	4	T600	PS-0112	4	PX-888	PS-0110	2			
CP150	PS-0111	3	MS350R	PS-0112	4	T6000	PS-0112	4	PX-888K	PS-0110	2			
CP200	PS-0111	3	MT350R	PS-0112	4	T6200	PS-0112	4	PX-328	PS-0110	2			
CT150	PS-0111	3	MT352TPR	PS-0112	4	T6210	PS-0112	4	PX-333	PS-0110	2			
CT250	PS-0111	3	MU350R	PS-0112	4	T6212	PS-0112	4	PX-999	PS-0110	2			
CT450	PS-0111	3	SX500	PS-0112	4	T6220	PS-0112	4	PX-555	PS-0110	2			
CT450LS	PS-0111	3	SX620R	PS-0112	4	T6222	PS-0112	4	Quansheng 7					
GP68	PS-0111	3	SX700	PS-0112	4	T6250	PS-0112	4						
GP88	PS-0111	3	SX709R	PS-0112	4	T6300	PS-0112	4				TG-UV2	PS-0110	2
GP88S	PS-0111	3	SX750	PS-0112	4	T6300AA	PS-0112	4				TG-K4AT	PS-0110	2
GP300	PS-0111	3	SX800	PS-0112	4	T6310	PS-0112	4				TG-2AT	PS-0110	2
GP308	PS-0111	3	SX900	PS-0112	4	T6312	PS-0112	4				TG-45AT	PS-0110	2
GP350	PS-0111	3	SX920R	PS-0112	4	T6320	PS-0112	4				TG-42AT	PS-0110	2
GP2000	PS-0111	3	T100	PS-0112	4	T6322	PS-0112	4				TG-22AT	PS-0110	2
GTI	PS-0111	3	T200	PS-0112	4	T6400	PS-0112	4				TG-25AT	PS-0110	2
GTX	PS-0111	3	T200TP	PS-0112	4	T6412	PS-0112	4				Retevis 50		
PI0	PS-0111	3	T260	PS-0112	4	T6500	PS-0112	4						
P040	PS-0111	3	T260TP	PS-0112	4	T6500AA	PS-0112	4	RT22	PS-0110	2			
P080	PS-0111	3	T265	PS-0112	4	T6510	PS-0112	4	RT21	PS-0110	2			
PI10	PS-0111	3	T270	PS-0112	4	T6512	PS-0112	4	RT19	PS-0110	2			
PI225	PS-0111	3	T280	PS-0112	4	T6550	PS-0112	4	H-777	PS-0110	2			
P200	PS-0111	3	T289	PS-0112	4	T6552R	PS-0112	4	H-777S	PS-0110	2			
SP10	PS-0111	3	T400	PS-0112	4	T7000	PS-0112	4	RT15	PS-0110	2			
SP21	PS-0111	3	T4000	PS-0112	4	T7100	PS-0112	4	RT22S	PS-0110	2			
SP50	PS-0111	3	T402	PS-0112	4	T7100R	PS-0112	4	RT68	PS-0110	2			
LTS2000	PS-0111	3	T460	PS-0112	4	T7150	PS-0112	4	RB18	PS-0110	2			
XTN446	PS-0111	3	T465	PS-0112	4	T7150R	PS-0112	4	RT27	PS-0110	2			
XTN500	PS-0111	3	T480	PS-0112	4	T7200	PS-0112	4	RB35	PS-0110	2			
XTN600	PS-0111	3	T4800	PS-0112	4	T7200AA	PS-0112	4	RT21V	PS-0110	2			
CIS446	PS-0111	3	T4800AA	PS-0112	4	T7400	PS-0112	4	RB26	PS-0110	2			
HANDIECOM	PS-0111	3	T4900	PS-0112	4	T7400AA	PS-0112	4	RT18	PS-0110	2			
HANDIEPRO	PS-0111	3	T4900AA	PS-0112	4	T7400R	PS-0112	4	RT1	PS-0110	2			
DTR2400.	PS-0111	3	T5000	PS-0112	4	T7450	PS-0112	4	RT28	PS-0110	2			
EM1000	PS-0112	4	T5000AA	PS-0112	4	T7450R	PS-0112	4	RT5	PS-0110	2			
EM1000R	PS-0112	4	T5100	PS-0112	4	T800	PS-0112	4	RT-5R	PS-0110	2			
EM1010TPR	PS-0112	4	T5146	PS-0112	4	T8000	PS-0112	4	RT-5RV	PS-0110	2			
EM1020R	PS-0112	4	T5200	PS-0112	4	T8500	PS-0112	4	RT85	PS-0110	2			
F60	PS-0112	4	T5300	PS-0112	4	T8550	PS-0112	4	RT76	PS-0110	2			
FR50	PS-0112	4	T5320	PS-0112	4	T9000	PS-0112	4	RT76P	PS-0110	2			
FR60	PS-0112	4	T5400	PS-0112	4	T9500	PS-0112	4	RT7	PS-0110	2			
FV200	PS-0112	4	T5410	PS-0112	4	T9500R	PS-0112	4	RT27V	PS-0110	2			
FV200AA	PS-0112	4	T5412	PS-0112	4	T9500XLR	PS-0112	4	RB38V	PS-0110	2			
FV200R	PS-0112	4	T5420	PS-0112	4	T9550	PS-0112	4	RB17V	PS-0110	2			
FV300	PS-0112	4	T5422	PS-0112	4	T9550XLR	PS-0112	4	RB17A	PS-0110	2			
FV500	PS-0112	4	T5500	PS-0112	4	T9580XLR	PS-0112	4	RT67	PS-0110	2			
FV500AA	PS-0112	4	T5500AA	PS-0112	4	T9650	PS-0112	4	RT17	PS-0110	2			
FV500R	PS-0112	4	T5512	PS-0112	4	T9680	PS-0112	4	RB17	PS-0110	2			
FV600	PS-0112	4	T5522	PS-0112	4	APX-4000	PS-0124	12	RT69	PS-0110	2			
FV700	PS-0112	4	T5532	PS-0112	4	APX-6000	PS-0124	12	RB27	PS-0110	2			
FV750	PS-0112	4	T5550	PS-0112	4	APX-7000	PS-0124	12	RT80	PS-0110	2			
FV800	PS-0112	4	T5600	PS-0112	4	APX-8000	PS-0124	12	RT81	PS-0110	2			
MB140R	PS-0112	4	T5620	PS-0112	4	XPR-7350	PS-0124	12	RT84	PS-0110	2			
MC220R	PS-0112	4	T5700	PS-0112	4	XPR-7350e	PS-0124	12	RT53	PS-0110	2			
MC225R	PS-0112	4	T5710	PS-0112	4	XPR-7380e	PS-0124	12	RT10	PS-0110	2			
MD200TPR	PS-0112	4	T5720	PS-0112	4	XPR-7550	PS-0124	12	RT43	PS-0110	2			
MH230R	PS-0112	4	T5725	PS-0112	4	XPR-7550e	PS-0124	12	RT72	PS-0110	2			
MH230TPR	PS-0112	4	T5800	PS-0112	4	XPR-7580e	PS-0124	12	RT26	PS-0110	2			
MHP61	PS-0112	4	T5820	PS-0112	4	Puxing 10			RT86	PS-0110	2			
MHP71	PS-0112	4	T5822	PS-0112	4				RB25	PS-0110	2			
MHP81	PS-0112	4	T5900	PS-0112	4				PX-777	PS-0110	2	RA16	PS-0110	2
MJ270R	PS-0112	4	T5920	PS-0112	4				PX-777 Plus	PS-0110	2	RB37	PS-0110	2
MR350R	PS-0112	4	T5950	PS-0112	4				PX-666	PS-0110	2	RT3S	PS-0110	2
MR355R	PS-0112	4	T5950AA	PS-0112	4				PX-3288	PS-0110	2	RA85	PS-0110	2

RB87	PS-0110	2	TH-UVF9	PS-0110	2	FT-65	PS-0111	3	FT-3DR	PS-0121	9	
RB29	PS-0110	2	TH-UVF9D	PS-0110	2	FT-4X	PS-0111	3	FT-50	PS-0121	9	
RB39	PS-0110	2	Wouxun 13			FT-270	PS-0120	8	FT-60	PS-0121	9	
RB85	PS-0110	2				FT-270E	PS-0120	8	FT-60E	PS-0121	9	
TYT 16				KG-UVDIP	PS-0110	2	FT-270R	PS-0120	8	FT-60R	PS-0121	9
				KG-UV6D	PS-0110	2	VX-6	PS-0120	8	FT-70D	PS-0121	9
	300	PS-0110		2	KG-UV8D	PS-0110	2	VX-6E	PS-0120	8	VX-3	PS-0121
	500	PS-0110	2	KG-UVA1	PS-0110	2	VX-6R	PS-0120	8	VX-3E	PS-0121	9
	600	PS-0110	2	KG-699	PS-0110	2	VX-7	PS-0120	8	VX-3R	PS-0121	9
800	PS-0110	2	KG-689	PS-0110	2	VX-7E	PS-0120	8	VX-5R	PS-0121	9	
900	PS-0110	2	KG-669	PS-0110	2	VX-7R	PS-0120	8	VX-8	PS-0121	9	
990	PS-0110	2	KG-659	PS-0110	2	FT-10R	PS-0121	9	VX-8D	PS-0121	9	
TH-F2	PS-0110	2	KG-679	PS-0110	2	FT-1D	PS-0121	9	VX-8R	PS-0121	9	
TH-F3	PS-0110	2	KG-889	PS-0110	2	FT-1DE	PS-0121	9	FTA450	PS-0118	6	
TH-F5	PS-0110	2	KG-869	PS-0110	2	FT-1DR	PS-0121	9	FTA250L	PS-0118	6	
TH-F6	PS-0110	2	KG-819	PS-0110	2	FT-2D	PS-0121	9	FTA450L	PS-0118	6	
TH-F7	PS-0110	2	KG-816	PS-0110	2	FT-2DE	PS-0121	9	FTA550	PS-0118	6	
TH-UVF1	PS-0110	2	Yaesu 39			FT-2DR	PS-0121	9	FTA550L	PS-0118	6	
TH-F8	PS-0110	2				FT-3D	PS-0121	9	FTA750L	PS-0118	6	
TH-UVF8D	PS-0110	2		FT-25	PS-0111	3						